


What you'll find in the case/box

The Armodilo Banner Stand is comprised of the following hardware:

Banner Stand Components

- A. Banner Stand Base Connector
- B. Banner Stand "X" Connector
- C. Banner Stand Post "1"
- D. Banner Stand Post "2"
- E. Banner Stand "X" Tubes (x4)
- F. Connector Screws (x2)

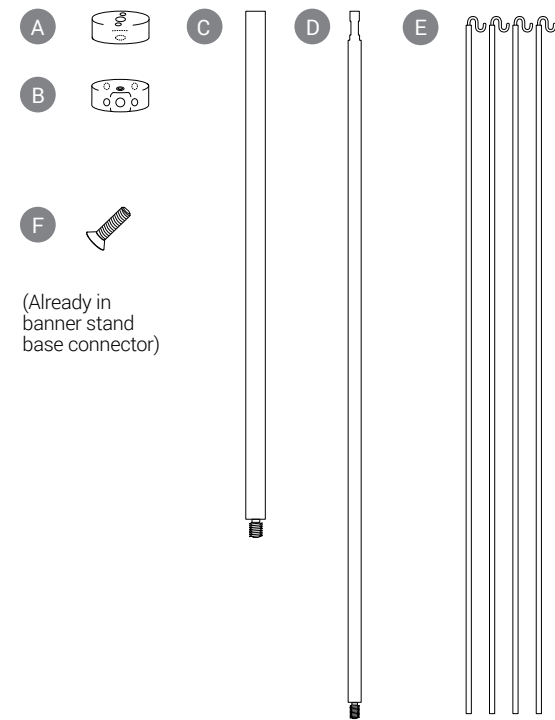

Unpacking and assembling your banner stand

Everything you need has been neatly packed inside the case or if ordered separately, a box. Please note the arrangement of all the parts as they will go back in the same location for future travel and storage.

Printing the graphics

The banner graphic is sized at 14" x 54.5" with four grommets located 0.75" from the edges of the four corners. Any type of material could be used as long as it can handle a small amount of tension from the "X" tension hardware.

The template for the banner can be downloaded online in our **Support > Downloads** section at www.armodilo.com

Assembling the rear banner stand

1. Locate the **Banner Stand Base Connector (A)**
2. Holding the **Baseplate** with the **countersinks** facing up, place the **Banner Stand Base Connector (A)** underneath the **Baseplate**, aligning the set screw holes. Take two **Connector Screws (E)** and thread them through the **Baseplate** into the **Banner Stand Base Connector (A)**. Using the **Hex Driver** provided, fasten the bolts and hand tighten to fasten.

Important: DO NOT OVERTIGHTEN any of the bolts or screws. Damage can result from excessive force on the bolts or set screws that hold the components together.

3. Turn the **Baseplate** around so that the **Banner Stand Connector** is on top.
4. Locate the **Banner Stand Post "1" (C)** and align it with the hole in the **Banner Stand Base Connector (A)**. Turn **Banner Stand Post "1" (C)** clockwise to thread the post into the **Banner Stand Base Connector (A)**.
5. Locate the **Banner Stand Post "2" (D)** and align it with the hole in the **Banner Stand Post "1" (C)**.
6. Turn **Banner Stand Post "2" (D)** clockwise to thread the posts together.

7. Locate the **Banner Stand "X" Connector (B)**
8. Insert the **Banner Stand "X" Tubes (E)** into the four holes of the **Banner Stand "X" Connector** as shown (*shortened versions of the Banner Stand "X" Tubes (E) are shown for illustration purposes only*)
9. Finding a clean flat surface, layout your 14" x 54.5" banner with the printed side down
10. Place the **Banner Stand "X" Connector** and **Banner Stand "X" Tubes** on top of the banner (ensuring that the open hole in the **Banner Stand "X" Connector (B)** is facing downward and that the locking set screw is facing out and away from the banner). One by one hook the corner grommets as shown. Slight tension will be required to secure the last two hooks into the grommets.
11. Taking the entire **Banner Assembly** (*shortened version shown for illustration purposes*), align the bottom hole of the **Banner Stand "X" Connector** with the top of the **Banner Stand Post "2"** and insert as shown
12. Align the banner with the Armodilo Tablet Display Stand and hand tighten the set screw in the **Banner Stand "X" Connector (B)**

